

<https://doi.org/10.52326/ic-ecco.2021/SEC.04>



Interest based adaptive billboard content management

Victor Moraru¹, Viorel Cărbune²

¹ Technical University of Moldova, 9/7 Studenților street, MD-2045, Chișinău, Republica Moldova, victor.moraru@calc.ut.md

² Technical University of Moldova, 9/7 Studenților street, MD-2045, Chișinău, Republica Moldova, viorel.carbune@calc.utm.md

Abstract—The street advertising has undergone some significant changes last years: the traditional advertising billboards are progressively replaced by electronic display devices (LED screens) that are able to change the content in real-time and enable the dynamic content management. This paper aims to develop an adaptive advertising strategy based on the preference of the audience in front of the screen. Each person own on his smartphone special software in order to set up his interests in advertising broadcast. In this way the people define their profiles hat are collected by the billboard which selects the most appropriate type of advertising to be broadcasted at that time. The proposed method aims to transform a simple display equipment into intelligent one able to adapt the broadcasted content to the requirements of the nearness people. It aims to maximize the efficiency of billboard operation and, at the same time, to bring satisfaction to the audience.

Keywords— street advertising, out-of-home advertising, billboards, digital advertising screens, content management

I. INTRODUCTION

Street or outdoor advertising, or, called more recently out of home advertising (abbreviated OOH) is one of the oldest and simplest methods of promoting products and services. Street advertising is usually represented by billboards designed to display information about products, manufacturers, sellers, services, locations, etc. They are managed by specialized companies that display that information for a certain period of time and are interested in implementing new display strategies in order to reach as wide audience as possible and increase in this way their profits.

In the Republic of Moldova, OOH accounts for approximately 20% of the advertising market volume. The street advertising market in Moldova offers more than 10 formats (billboard, big-board, city-light, LED screens, cubes, clocks, panels, banners, light-boxes at public transport stations, etc.). Also, the street advertising market in the Republic of Moldova has more than 10 operators with a total of over 6000 different advertising billboards [1].

Advantages of the street advertising:

- More than 70% of people spend most of their time outside their homes.
- Street advertising is the best cost-effective advertising method.
- It has a high visual impact on the people compared to other advertising sources: print media, online press, shops, telephone.
- Continuous display of the message 24/24 hours for all nearby pedestrians and all cars in traffic in the area. Which makes it possible to reach busy, active and moving people. Statistics show that we spend an average of 1.3 hours per day on the street.
- It is free and doesn't require specific technical means to access it.
- It reaches a lot of nearness people without requiring significant investments.

A more detailed analysis of this topic can be found in [2].

The main disadvantages of street advertising are the inability to select the target audience and the extremely low volume of disseminated information (laconic text of up to 2-3 sentences, images, etc.) without the possibility to provide details [3].

Among the factors influencing the efficiency of the billboard are its location, the quality of the content presentation, and, last but not least, the coherence between the broadcasted content and the existing at that time audience near the billboard. As the everyday audience is very heterogeneous, it is practically impossible for traditional billboards to adapt the broadcasted content to present people. More recently, one of the most important factors for increasing efficiency is the use of digital display equipment, their impact on the audience being about 2.5 times higher compared to traditional display. These equipments have marked a new era in the development of street advertising known as Digital Out Of Home advertising (DOOH) and which offers great possibilities compared to the classic methods and which was stormy developed in recent years [4].

<https://doi.org/10.52326/ic-ecco.2021/SEC.04>



This article proposes an innovative method of organizing street advertising which, based on modern technological displaying equipment and smart technologies, is able to collect the information about the composition of the people in front of the billboard and adapts in real time the broadcasted content to interest as many as possible people.

II. DESCRIPTION OF THE PROPOSED METHOD

In this article we will analyze the operation of a billboard with digital display (LED screen, plasma screen, projector, etc.) on which are displayed advertising information that is perceived by pedestrians passing in front of the billboard (Fig. 1).

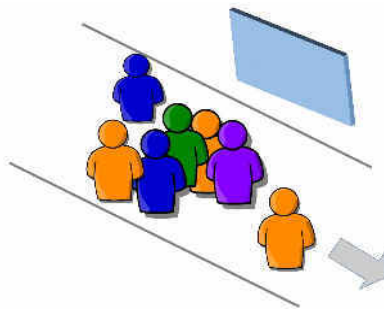


Figure 1. Traditional billboard

If we used the classic strategy for traditional screens with static display, this panel could be rented to a company for a certain duration to display the information about the products and services of that company. The efficiency of this approach is relatively low for the simple reason that the same information is disseminated for a long time (weeks or even months) and the public passing on the street tends to be largely the same (people leaving and returning home from service, those walking through the street near the house, etc.). The proportion of these people can be considerable, reaching in some cases 80-90%. Which means that the informative value of the display decreases day after day, hence the low efficiency of this approach. It depends largely on the location of the billboard and can be quite high in places where the public varies a lot every day (near stations, markets, shopping malls, etc.).

Equipping the billboard with a digital display screen greatly reduces these problems because the information displayed can be changed more often, thus maintaining pedestrians' interest in it. The advertising company can run advertising for several products for the same duration, which leads to a considerable increase in revenue.

The method proposed in this article aims to increase the efficiency of the billboard by adapting in real time the strategy of dissemination of content to the surrounding public. Assuming that the majority of pedestrians have a smartphone capable of connecting to WiFi (IEEE 802.11) wireless network, this equipment can be used, in addition

to all, as a source of information about the preferences of its owner. In order to define his preferences, the user will be asked to install on his phone a mobile application available in the store (Google Play for Android operating system and iTunes for Apple products). That proposal should be attractive in order to interest the user to accept it (a smart marketing solution is required here). It could also include other useful services (eg weather forecast display, exchange rate, etc.). When installing the application, a questionnaire will be launched. By answering the asked questions (checking the answers in a proposed list) the user will create a profile that will specify his preferences and interests. This mobile profile that doesn't contain any personal information (name, phone number, address, email, etc.) may be broadcasted on-demand if requested by another application on the network or may be continuously broadcasted by the application in order to discover certain services in the proximity network (for example, to search in the network people with similar preferences). It is very important to establish the structure of the questionnaire, which should be neither too voluminous with the risk of boring the user when completing it, nor too short to avoid an incomplete and uninformative profile. In order to simplify the structure of the questionnaire, users' preferences will have to be divided into categories (eg sports products, mobile phones, women's clothing, footwear, household appliances, etc.). The user profile will be specified through a list of selected categories in the questionnaire. It will start with the most favorite categories followed by others arranged in descending order according to the degree of preference. It may also be proposed to set the weights for each category in the list. The definition of the content and of the optimal structure of the questionnaire requires a more rigorous analysis and will not be discussed further in this article.

The simplest strategy for running advertising is to use a circular algorithm (Round Robin type) displaying the advertising one by one for a certain duration for each of the categories on the server. The same policy can be applied to products that fall into the same category. This method is a traditional one and ensures an equal display time for each product in the long run. It is not adaptive and does not take into account the audience composition next to the billboard. Its only advantage is the simplicity and fairness of the sharing of display resources between the promoted products.

One way to improve the efficiency of this system would be to adapt the broadcasted content to the preferences of the audience near the billboard. For this purpose, it is proposed to equip the panel with a WiFi access point that will have an open (unsecured) configuration that supports the connection without security key of any equipment in the radio sensitivity area with a radius that can reach up to 100 meters. Given the omnidirectional nature of radio coverage for traditional

<https://doi.org/10.52326/ic-ecco.2021/SEC.04>



access points, the billboard should be installed at the side of the road so that pedestrians pass only in front of it and not have the rear access. Another solution would be to use a directed broadcast access point (which transmits and receives radio waves only in a certain direction or which uses shielding elements to limit emissions / receptions in / from unwanted directions). The panel will also be equipped with a server containing some installed applications needed to ensure the logic of the system work, including a video streaming server and the information to be broadcasted and eventually be modified in real time through the network. The information about the promoted products is classified in the same categories that were specified in the questionnaire. When it is decided to launch the display of a certain category, a product in this category will be selected according to a predefined algorithm and that information will be displayed on the screen.

When the pedestrian enters the radio sensitivity area near the panel he will automatically connect to the access point and the server will receive his profile. The appearance of the pedestrian will be counted by entering his profile in a list and by increment a variable that corresponds to the number of present users in front of the billboard. From this moment the server will start monitoring the presence of the respective equipment in the sensitivity area, this being possible because its IP address is known being assigned to it by DHCP by the access point. Presence monitoring is done by transmitting through the network at regular intervals of short messages (pings) to which the mobile equipment will respond thus confirming its presence. From the moment when no confirmations are received from the respective mobile phone, it is removed from the list and the presence variable is decremented.

The proposed system is shown in Fig. 2. Pedestrians move in the billboard direction, reach the sensitivity area and then leave it continuing their way.

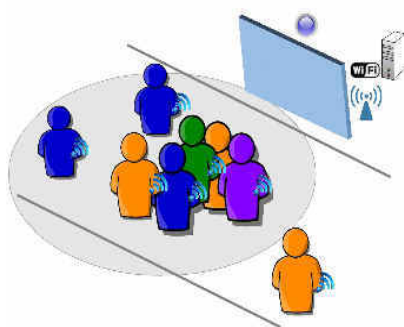


Figure 2. Billboard with adaptive content management

Given that we have a number of N categories of advertising, we can expect to have around the panel up to N groups of pedestrians, each of which will correspond to one of the categories defined above. The groups are

monitored separately to know in real time the number of pedestrians in each of them.

The application that manages the advertising display performs the following functions: receives user profiles with their preferences and interests, continuously monitors their presence, counts the audience in the area of radio sensitivity, make decisions about real-time content be displayed on the advertising screen, etc. For simplicity, we'll assume that the ad delivery time for all products in all categories is the same or roughly the same (for example, 30 seconds). In other words, the information displayed on the screen must change every 30 seconds regardless of the evolution of other factors.

The decision on the content been broadcasted in the next time interval is based on the data collected in the previous interval. Advertising will be broadcasted for the category that has the largest presence in front of the panel and at the same time information will be collected about the composition of the audience that will be used in the next time slot.

III. ESTIMATING THE EFFECTIVENESS OF THE PROPOSED METHOD

The methods of estimating the effectiveness of advertising can be very different: from conducting a survey on its quality [5] to assessing its impact on the sales volume of the advertised products [6]. In this article we will use a specific evaluation method based on results obtained by simulation that would show us the efficiency of the proposed method in relation to other methods.

We aimed to use an agent-oriented approach for simulation and to use a specialized software (GAMA platform [7]) to implement our model. This approach makes possible to describe each agent and its spatial movement through its attributes and behavior. In this case, each pedestrian and the screen are represented by specific agents that interact with each other, thus realizing the logic of the system operation.

We have to define some technical parameters of the analyzed system before the simulation. We will simplify the initial model described in the previous chapter by reducing the number of advised product categories to 4 assuming that a user can request only one category (the simplest case). Therefore we will have only 4 groups of pedestrians who will move in both directions in front of the billboard. The sensitivity area will have a length of 50 meters, the speed of pedestrians will be from 0.5 m / s (slow pedestrians) to 1.5 m / s (fast pedestrians) and will be chosen randomly. Pedestrian arrivals are independent, there are 4 types of pedestrians (one for each category). Pedestrians can move in any direction and are counted at the entrance and at the exit of the sensitivity area.

In Fig. 2. the product categories are coded by color: we have pedestrians belonging to each of the 4 categories (so 4 different colors) and the screen can also broadcast 4 categories of advertising that correspond to those colors

<https://doi.org/10.52326/ic-ecco.2021/SEC.04>



(the color of the light on the screen in Fig. 2 corresponds to the color of the broadcast category at a certain time). We will set the duration of a time slot equal to 30 seconds (it corresponds to the duration of the advertisement for a product belonging to one of the categories), and the simulation time in the example analyzed below is 10 minutes.

The simulation environment and the respective process are shown in Fig. 3: pedestrians cross the sensitivity area of the billboard moving in arbitrary directions. The system monitors and counts these movements and establishes the category of advertising currently broadcasted taking into account the largest group (the color of the square that corresponds to the screen in Fig. 3)

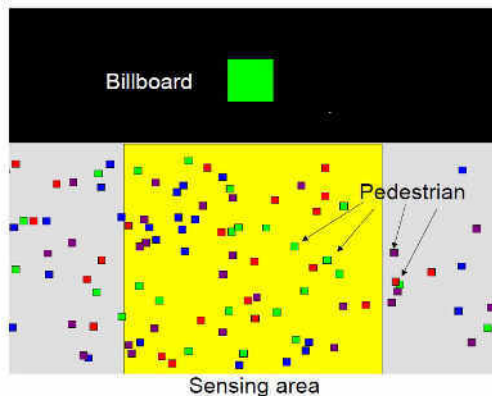


Figure 3. Simulation environment and system simulation (pedestrian movement, dynamic content modification) in GAMA platform

In Fig. 4 are shown the evolution of the groups and the state of the screen: at the top is the number of pedestrians in the 4 groups (4 different colors), and at the bottom are presented the timers for each time slot, their color indicates the category advertising displayed on the screen in that time slot.

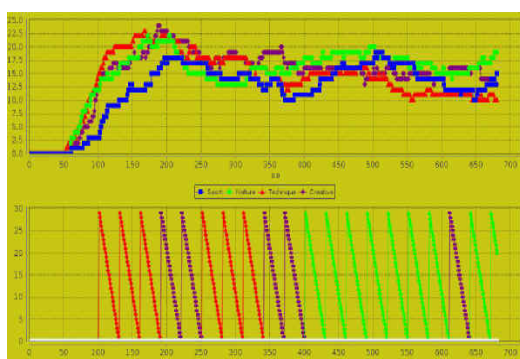


Figure 4. The evolution of groups and screen status over time

We notice the correspondence between the color of the slit and the color of the largest group of pedestrians at that time.

During the simulation for each pedestrian we will calculate the satisfaction index defined by the ratio between the display time of his favorite advertisement and the total duration of his presence in the sensitivity area in front of the screen. The range of variation of this index: [0,1]. The average of these values will be used to estimate the overall system performance index: the overall average satisfaction. The index allows us to compare different system configurations: the larger it is, the more efficient is the system.

Following the long-term similar simulation of the system described above and the one with circular screen allocation, it turned out that the first one is on average 15-20 percent more efficient than the Round Robin system.

CONCLUSIONS

The main purpose of the article is to propose a solution that would allow an adaptive management of the content broadcast through billboards based on digital display equipment (LED screens in particular) using information collected in real time about the preferences and the interests of the people in front of the screen. The obtained results are encouraging, they demonstrate the feasibility of the proposed method and its adaptability in real time and the proposed performance index allows the comparison of results for different configurations of the analyzed system.

In the future, a more detailed and realistic simulation of the proposed method is foreseen: several product categories and profiles with multiple weighted preferences, more complex pedestrian flows with grouped arrivals, studying the possibility of integrating the method at the level of billboard network.

REFERENCES

- [1] *Publicitate outdoor* <https://idegraf.md/publicitate-outdoor>, visited at 13/09/2021 (in Romanian)
- [2] Grigore Belostecnic, Nicolae Răilean, *Publicitatea exterioară: particularități și strategii*, Revista „Economica” nr.2 (76) 2011, Chișinău, Republica Moldova, 2011 (in Romanian)
- [3] Luc Marce Luc Marcenac, Alain Milon, Serge-Henri Saint-Michel *Strategii Publicitare. De la Studiul de Marketing la Alegerea Diferitelor Media*, -Polirom, Iasi, Romania, 2006. (in Romanian)
- [4] *Out-of-home advertising* https://en.wikipedia.org/wiki/Out-of-home_advertising, visited at 13/09/2021
- [5] Abhilasha Mehta *Advertising Attitudes and Advertising Effectiveness*, Journal of advertising research, 2001.
- [6] Bhargava Mukesh, Naveen Donthu *Sales Response to Outdoor Advertising*, Journal of advertising research, 1999
- [7] *GAMA platform* <https://gama-platform.github.io/>, visited at 13/09/2021